


Attach Seat Deck (H) to Backrest with Rear Legs (G) using Bolt (A) or Bolt (B), Spring Washer (D) and Washer (C). Tighten using provided Allen Key (E).

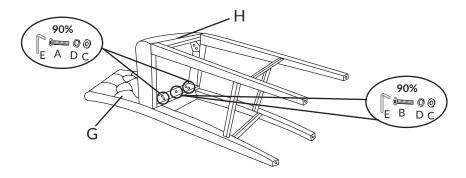

4 Secure Side Rungs (K and M) to the Legs using Screw (F). Tighten using a Screw Driver. Then, secure Bolt (A and B), Spring Washer (D) and Washer (C) under Seat Deck (H) using provided Allen Key (E).

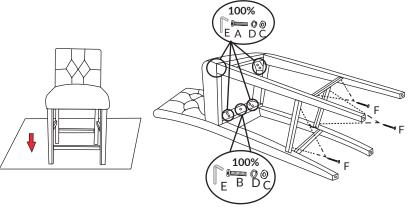


5 Secure Velcro under Seat Deck (H).

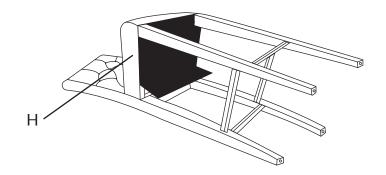



Model:	
Lot No:	
Date of Purchase:	

BELLA TUFTED COUNTER STOOL

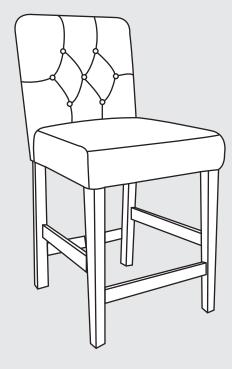

ADULT ASSEMBLY REQUIRED

If you are missing any parts or have any questions regarding assembly, do not return this item to the retailers store. Please call our toll-free, customer service number and have this assembly manual open to the parts list ready to provide the model name, number and part name or number.



Customer Service

1-877-864-5752


8:30 AM PST - 4:00 PM PST (Monday-Friday)

Website: www.dwellhom.com Missing Parts: parts@dwellhom.com Warranty Information: www.dwellhom.com/warranty

WARNING: This product may contain small components, please ensure they are kept away from small children.

PARTS AND HARDWARE

Avoid using sharp objects such as a knife to cut open packing as you may accidentally damage the upholstery.

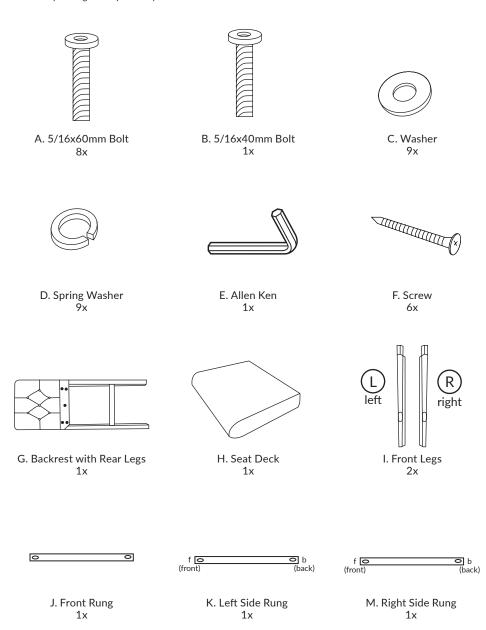


PLEASE NOTE: On part I, there will be markers that will indicate what leg is Left (L) and what left is Right (R). On parts K and M, there will be markers that indicate what side of the rung is the front (f) and back (b) side.

ASSEMBLY INSTRUCTIONS

Do not fully tighten bolts until assembly is complete.

1 Attach Left Side Rung (K) and Right Side Rung (M) to Backrest with Rear Legs (G) making sure the holes on Left Side Rung (K) and Right Side Rung (M) are facing down, towards the bottom of Backrest with Rear Legs (G).

PLEASE NOTE: Do not use Screws (F) to attach the Rungs (K and M) to Backrest with Rear Legs (G) at this point in the assembly.

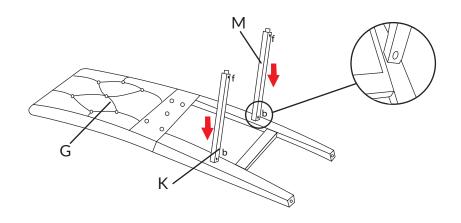

Attach Front Legs (I) to Seat Deck (H) using Bolt (A), Spring Washer (D) and Washer (C). Tighten using provided Allen Key (E).

