



- 3** Attach Backrest (E) to Seat Deck (F) using Bolt (G), Washer (H) and Lock Washer (I). Tighten using provided Allen Key (J).

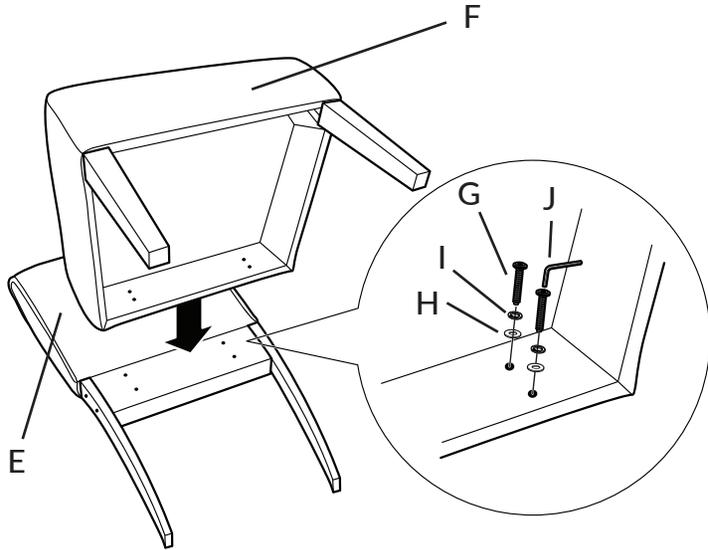


- 4** Enjoy your new Accent Chair. You can re-tighten Step 2 periodically if the chair becomes loose.

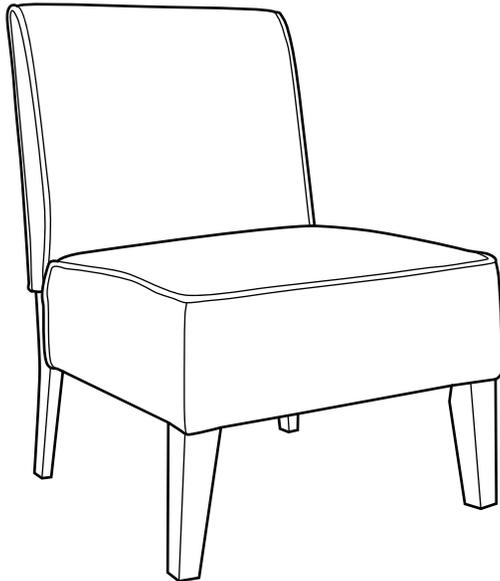

# dh

Model: \_\_\_\_\_  
Lot No: \_\_\_\_\_  
Date of Purchase: \_\_\_\_\_

## JANE

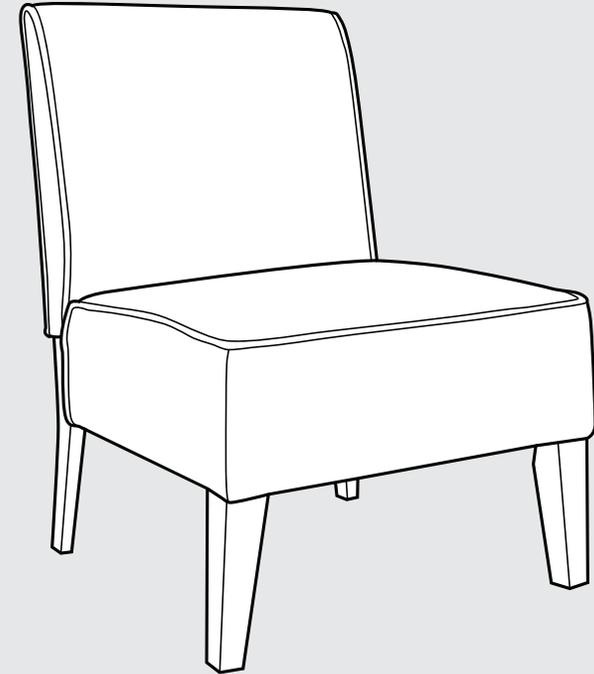

### ADULT ASSEMBLY REQUIRED

If you are missing any parts or have any questions regarding assembly, do not return this item to the retailers store. Please call our toll-free, customer service number and have this assembly manual open to the parts list ready to provide the model name, number and part name or number.

Customer Service

**1-877-864-5752**

8:30 AM PST - 4:00 PM PST (Monday-Friday)

Website: [www.dwellhom.com](http://www.dwellhom.com)

Missing Parts: [parts@dwellhom.com](mailto:parts@dwellhom.com)

Warranty Information: [www.dwellhom.com/warranty](http://www.dwellhom.com/warranty)



VN

**WARNING:** This product may contain small components, please ensure they are kept away from small children.

## PARTS AND HARDWARE

Avoid using sharp objects such as a knife to cut open packing as you may accidentally damage the upholstery.



A. Left Front Leg  
1x




B. Right Front Leg  
1x




C. Left Rear Leg  
1x




D. Right Rear Leg  
1x



E. Backrest  
1x



F. Seat Deck  
1x



G. 5/16x60mm Bolt  
12x



H. Washer  
12x



I. Lock Washer  
12x




J. Allen Key  
1x

## ASSEMBLY INSTRUCTIONS

Do not fully tighten bolts until assembly is complete.

- 1 Open the velcro closure on the Backrest (E). Attach the Right Rear Leg (D) and Left Rear Leg (C) to the Backrest (E) using Bolt (G), Washer (H) and Lock Washer (I). Tighten using provided Allen Key (J). Close velcro closure after tightening the bolts.

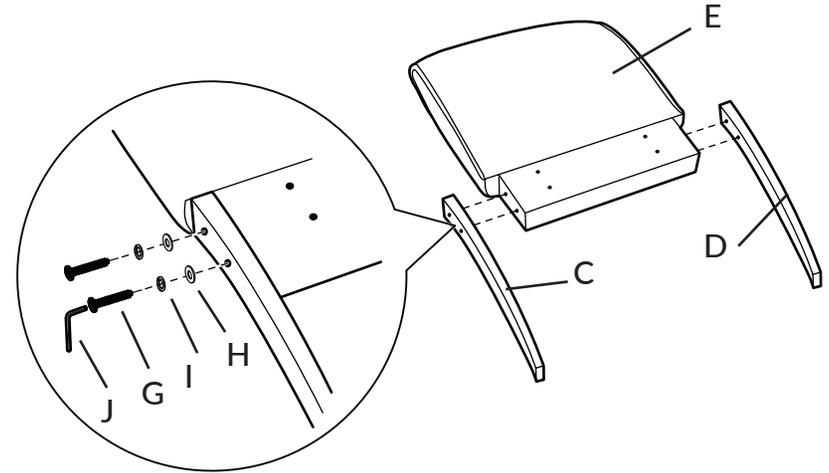

- 2 Open the bottom velcro dust cover located on the bottom of the Seat Deck (F). Attach the Left Front Leg (A) and Right Front Leg (B) to Seat Deck (F) using Bolts (G), Washers (H) and Lock Washer (I). Tighten using provided Allen Key (J).

**NOTE:** Make sure metal insert nuts are facing pre-drilled holes in leg support.

